





Tecle Polipasto Prowinch c/carro electrico Monoviga 5 Tons trifasico

Características Esenciales

- Equipo de Doble Velocidad, Mono viga. Servicio Heavy Duty H4/M5.
- Dispositivos de Límite de alta precisión, Protección de Sobrecarga y Protección térmica
- Componentes de alta calidad, Motor SEW Eurodrive, VDF Schneider, contactores Eaton/Schneider
- Estándares US y EC ASME HST-1 , ASME B30.16 , ASME B30.17 , EN14492-2 , EN60204-32.
- 3 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

Capacidad de Carga	11023 lb / 5000 kg	Voltaje del Control	48V
Altura de Izaje Estandar (Customizable)	40 ft / 12 m	Marca Motor de Izaje	Sew Eurodrive
Velocidad /min	2.62 - 16.4 ft/min / 0.8 - 5 m /min	Reductor de Izaje	Sew Eurodrive FA
Numero de Velocidades	2 Speed	Hoist Contactor Brand	Schneider or EATON
Voltaje	3 Phase 208~240/440~480V 50/60Hz	Tipo Transmisión / Reductor	Sew Eurodrive
Potencia Total Watts	1.0 - 6.1 kW	Humedad	<85%
Clase de Servicio	H4/M5/2m/Class D	Temperatura	-4°~104° F / -20°~40° C
Tipo de Motor	Squirrel Cage Induction Motor	Potencia del Trolley	0.37 ~ 0.64 kW
Freno Motor	Electromagnetic Release Brake >125%	Nivel de Ruido	82 dB
Grado de Aislacion	F	Velocidad del Trolley /min	16 ~ 65 ft/min. / 5 ~ 20 m/min
Protección IEC Motor	IP55	Rango de ancho de la Viga	7.9~13.7 in / 200~350 mm
Protección Tablero de Control	IP65	Normas	ASME HST-4 , ASME B30.16 , B30.17 , EN14492-2 , EN60204-32
Control	Pendant Control and Optional Wireless F21	Garantía	3 Year

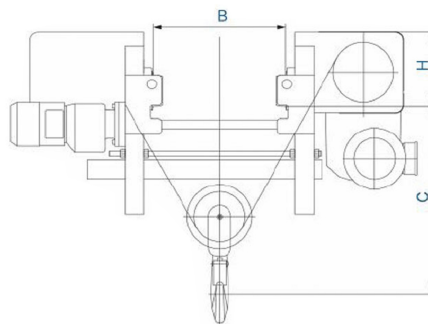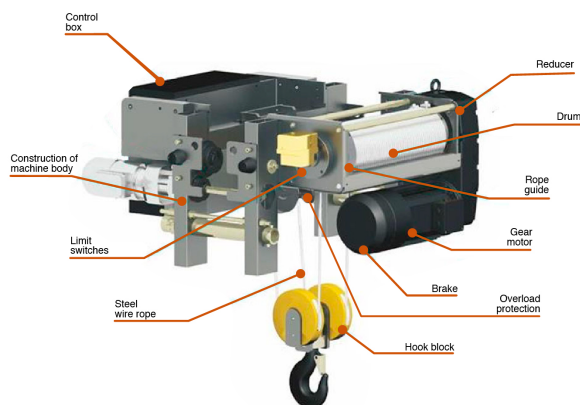

DRIVE TECHNOLOGY

SEW Eurodrive high performance Motor, reducer and brake. Compact design, light weight, low energy consumption, low noise and eco-friendly design. Electromagnetic brake disc (Asbestos-free). Long Service life and easy maintenance.



OVERLOAD PROTECTION

Load Cell connected to a Limit Relay (Adjustable) to avoid overloading of the hoist.



WIRE ROPE GUIDE

Helps the winding of the rope on the drum. Light weight and highly resistance. Design to reduce friction on the wire rope and avoid premature wear.



HIGH-PERFORMANCE WIRE ROPES

High-performance wire rope with tensile strength up to 2160Mpa. Galvanized surface and high flexibility to ensure long service life.




DRUM

Q345 steel, seamless grooved drum. Design to fulfill FEM and ASME standards and ensure a safe operation.



LIMIT SWITCHES

High precision adjustable height limit switches, for all movements of hoist and trolley.



LIFTING HOOK GROUP

DIN standard lifting hook with safety clasp. Forged by the high-strength material of T grade.



CONTROL BOX

Electric Control box with Schneider Inverter, Eaton contactors and components. Compact design, easy access, IP65 Enclosure.

Peso & Dimensiones

Peso Total

1323 lbs / 601 Kg

Detalles del Empaque

H Altura Muerta

596 mm

A Altura Total

846 mm

Referential Images / Imágenes Referenciales

Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso