




1/4 ton Electric Chain Hoist w/ Power Trolley 1 Speed 208~240V / 440~480V 3 ϕ 1/2 60HZ 13ft G100 Nickel Duty H4/M5

Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

Trolley Wheel Material	No. 45 steel	Hoist Motor Brake Type and DC Voltage	DC99V/DC207V
Hoist UL Components	UL Listed Contactors	Brake rectifiers-full-wave	PWRX-BKTF-FW
Trolley Beam Extension Kit	up to 12"	Hoist Motor Insulation Grade	F
Pendant Control Yes No	Yes	Load Chain weight per foot [lbs]	0.36
Pendant Control Emergency Stop	Yes	Reducer Lubrication Type	Oil
Overload Protection	Overload Motor Clutch	Altura de Izaje Estandard (Customizable)	13 ft / 4 m
Brake rectifiers-half-wave	PWRX-BKTF-HW	Velocidad /min	37.79 ft @60Hz 9.6 mt @50Hz
Power Cord Length and Phase Order	3 ft / Black L1 , Red L2 and Blue L3 Green ground	Numero de Velocidades	1 Speed
Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 15A at 220V and 10A at 460V	Voltaje	3 Phase 208~240/440~480V 50/60Hz
Optional Load Chain Brand & Country of Origin	FEC Japan	Potencia Total Watts	750
Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	Clase de Servicio	H4/M5/2m/Class D
Trolley Motor Brake Type and DC Voltage	DC99V/DC207V	Protección IEC Motor	IP55
Trolley Motor Insulation Grade	F	Control	Pendant Control IP66
Trolley Minimum Turn Radius	1.3	Voltaje del Control	48V
Trolley Beam Range	3" to 5"	Parada de Emergencia	Yes
Trolley Contactors Amps	20A	Hoist Contactor Brand	Schneider
Trolley Contactors Brand	Schneider	Tipo Transmisión / Reductor	Spur gearbox
Trolley UL Component	UL Listed	Tipo de Cadena	G100 Nickel
Trolley Contactors Coil Voltage	48V	Dimensiones de la Cadena	5mm
Trolley Wheel Diameter	95	Caidas de Cadena	1
Hoist Contactor Coil Voltage	48V	Longitud de cadena	13
2nd Package Type	Wood Crate	Humedad	20%~90%
Capacidad de Carga	1/4 ton	Temperatura	-4 ~ 104° F / -20 ~ 40° C
Hoist Contactors Amps	10A	Potencia del Trolley	250
1st Package Type	Wood Crate	Velocidad del Trolley /min	43.30 ft @60Hz 11 mt @50Hz
IEC Hoist IP Protection	IP55	Cantidad de Velocidades	1
IEC Pendant Control Protection	IP66	Normas	ASME HST-1 , ASME B30.16 , EN60204-36
Hoist Motor Power in KW	0.5	Garantía	3 Year
Hour Meter	Internal Working Hour Meter		

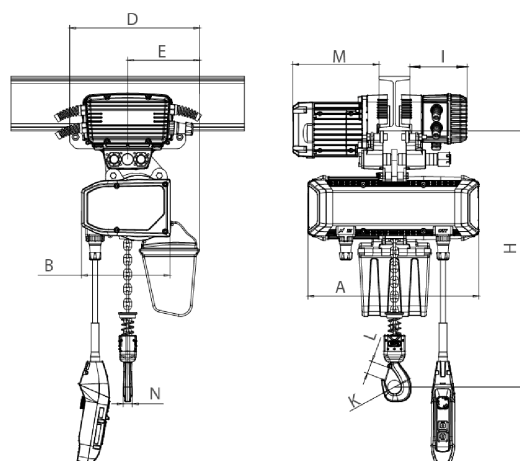

Rated load (t)	Type	Dimension (mm)									
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K
0.25-0.5	PWRXT0.25-0.5-VS	473	447	3500- 5500	217	334	152	147	220	20	35

Peso & Dimensiones

Peso Total 143 lbs / 65 Kg

Detalles del Empaque

H Altura Muerta 15.16

W Ancho 12.01

A Altura Total 15.16

J Boca Gancho 1.38

D Depth 17.32

Peso Total (sin cable o cadena) 116.28

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso