




1 ton Electric Chain Hoist w/ Power Trolley 2 Speed 208~240V / 440~480V 3ph 60HZ

Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

Trolley Beam Extension Kit	up to 12"	Hoist Contactor Coil Voltage	24 V
Trolley Beam Range	2" to 6"	Hoist Contactors Amps	18A
Trolley Minimum Turn Radius	1.3	Capacidad de Carga	1 ton
Trolley Wheel Material	No. 45 steel	Altura de Izaje Estandar (Customizable)	20 ft / 6 m
Trolley Wheel Diameter	95	Velocidad /min	1 st speed : (7.9 ft @60Hz - 2 mt @50Hz) / 2 nd speed : (25.59 ft @60Hz - 6.5 mt @50Hz)
Trolley Contactors Coil Voltage	24 V	Numero de Velocidades	2 Speed
Trolley Contactors Brand	Schneider	Voltaje	3 Phase 208~240/440~480V 50/60Hz
Trolley Contactors Amps	32A	Potencia Total Watts	2000
Trolley Motor Insulation Grade	F	Clase de Servicio	H4/M5/2m/Class D
Trolley Motor Brake Type and DC Voltage	DC99V/DC207V	Protección IEC Motor	IP55
Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	Control	Pendant Control IP66
Optional Load Chain Brand & Country of Origin	FEC Japan	Voltaje del Control	24V
Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 20A at 220V and 15A at 460V	Parada de Emergencia	Yes
Power Cord Length and Phase Order	3 ft / Black L1 , Red L2 and Blue L3□Green ground	Hoist Contactor Brand	Schneider
Brake rectifiers-half-wave	PWRX-BKTF-HW	Tipo Transmisión / Reductor	Spur gearbox
Overload Protection	Overload Motor Clutch	Tipo de Cadena	G100 Nickel
Pendant Control Emergency Stop	Yes	Dimensiones de la Cadena	7.1 mm
Pendant Control Yes No	Yes	Caidas de Cadena	1
2nd Package Type	Wood Crate	Longitud de cadena	20
1st Package Type	Wood Crate	Humedad	20%~90%
Reducer Lubrication Type	Oil	Temperatura	-4 ~ 104° F / -20 ~ 40° C
Load Chain weight per foot [lbs]	0.74	Potencia del Trolley	500
Hoist Motor Insulation Grade	F	Velocidad del Trolley /min	14.17~43.30 ft @60Hz 3.6~11 mt @50Hz
Brake rectifiers-full-wave	PWRX-BKTF-FW	Cantidad de Velocidades	2
Hoist Motor Brake Type and DC Voltage	DC99V/DC207V	Rango de ancho de la Viga	2" to 6"
Hour Meter	Internal Working Hour Meter	Radio Minimo de Giro	1.3
Hoist Motor Power in KW	1.5	Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-33
IEC Pendant Control Protection	IP66	Garantía	3 Year
IEC Hoist IP Protection	IP55		

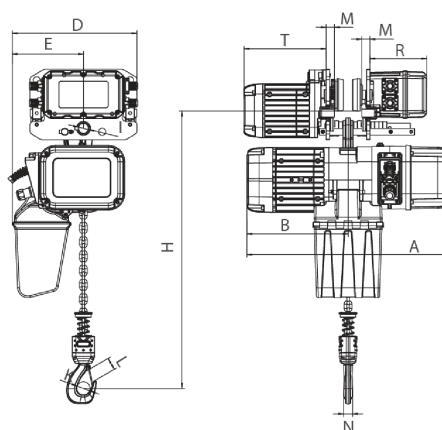

Rated load (t)	Type	Dimension (mm)												
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R
1	PWRXT1-01	473	440	3500- 5500	285	210	20	105	140					
2	PWRXT2-01	516	590		276	368	210	31	24	25	42	32	242	167
3	PWRXT3-01	600	681		350	422	264	36	28	35	52	42	242	167
5	PWRXT5-02	645	681		350	478	307	43	30	34	59	48	242	167

Peso & Dimensiones

Peso Total 244 lbs / 111 Kg

Detalles del Empaque

H Altura Muerta 20.31
W Ancho 14.49
A Altura Total 20.31
J Boca Gancho 1.65
D Depth 23.23
Peso Total (sin cable o cadena) 190.22

Referential Images / Imágenes Referenciales
 Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso