




10 ton Electric Chain Hoist w/ Power Trolley Variable Speed Trolley 208~240V / 440~480V 3½ 60HZ 40ft G100 Nickel Duty H4/M5

Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

Trolley Beam Extension Kit	up to 12"	Hour Meter	Internal Working Hour Meter
Trolley Beam Range	3.9" to 7"	Hoist Motor Power in KW	3+3
Trolley Minimum Turn Radius	2	IEC Pendant Control Protection	IP66
Trolley Wheel Material	No. 45 steel	IEC Hoist IP Protection	IP55
Trolley Wheel Diameter	139	Altura de Izaje Estandard (Customizable)	40 ft / 12 m
Trolley VFD Model	huayuan	Velocidad /min	10.63 ft @60Hz 2.70 mt @50Hz
Trolley VFD Brand	z-230	Numero de Velocidades	1 Speed
Trolley VFD Power in KW	2.5kW	Voltaje	3 Phase 208~240/440~480V 50/60Hz
Trolley Motor Insulation Grade	F	Potencia Total Watts	6750
Trolley Motor Brake Type and DC Voltage	DC99V/DC207V	Clase de Servicio	H4/M5/2m/Class D
Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	Protección IEC Motor	IP55
Optional Load Chain Brand & Country of Origin	FEC Japan	Control	Pendant Control IP66
Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 50A at 220V and 30A at 460V	Voltaje del Control	24V
Power Cord Length and Phase Order	3 ft / Black L1 , Red L2 and Blue L3 Green ground	Parada de Emergencia	Yes
Brake rectifiers-half-wave	PWRX-BKTF-HW	Hoist Contactor Brand	Schneider
Overload Protection	Overload Motor Clutch	Tipo Transmisión / Reductor	Spur gearbox
Pendant Control Emergency Stop	Yes	Tipo de Cadena	G100 Nickel
Pendant Control Yes No	Yes	Dimensiones de la Cadena	11.2 mm
Capacidad de Carga	10 ton	Caidas de Cadena	4
Hoist Contactors Amps	25A	Longitud de cadena	160
Hoist Contactor Coil Voltage	24 V	Humedad	20%~90%
Load Chain weight per foot [lbs]	1.83	Temperatura	-4 ~ 104° F / -20 ~ 40° C
2nd Package Type	Wood Crate	Potencia del Trolley	750
1st Package Type	Wood Crate	Velocidad del Trolley /min	2.75~27.55 ft @60Hz 0.7~7 mt @50Hz
Reducer Lubrication Type	Oil	Cantidad de Velocidades	Variable
Hoist Motor Insulation Grade	F	Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-38
Brake rectifiers-full-wave	PWRX-BKTF-FW	Garantía	3 Year
Hoist Motor Brake Type and DC Voltage	DC99V/DC207V		

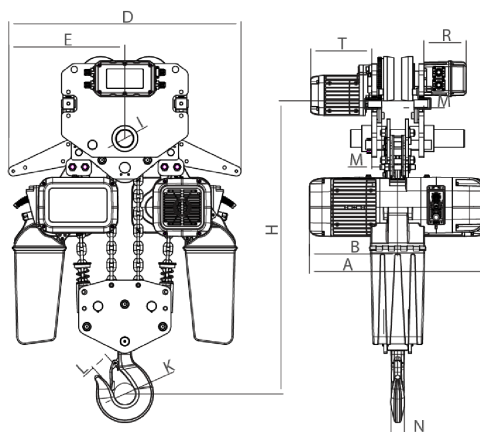

Rated load (t)	Type	Dimension (mm)												
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R
10	PWRXT10-04	1045	700	3500- 5500	350	920	460	70	39	48	85	80	242	167

Peso & Dimensiones

Peso Total 869 lbs / 395 Kg

Detalles del Empaque

H Altura Muerta 39.57

W Ancho 36.22

A Altura Total 41.14

J Boca Gancho 3.35

D Depth 27.56

Peso Total (sin cable o cadena) 697.88

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso