




20 ton Electric Chain Hoist w/ Power Trolley Variable Speed Trolley 208~240V / 440~480V 3½ 60HZ 40ft G100 Nickel Duty H4/M5

Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

Pendant Control Yes No	Yes	Hour Meter	Internal Working Hour Meter
Trolley Beam Extension Kit	up to 12"	Hoist Motor Power in KW	3+3
Trolley Beam Range	5.9" to 8.6"	IEC Pendant Control Protection	IP66
Trolley Minimum Turn Radius	2.2	Capacidad de Carga	20 ton
Trolley Wheel Material	No. 45 steel	Altura de Izaje Estandar (Customizable)	40 ft / 12 m
Trolley Wheel Diameter	139	Velocidad /min	5.31 ft @60Hz 1.35 mt @50Hz
Trolley VFD Model	huayuan	Numero de Velocidades	1 Speed
Trolley VFD Brand	z-230	Voltaje	3 Phase 208~240/440~480V 50/60Hz
Trolley VFD Power in KW	2.5kW	Potencia Total Watts	7500
Trolley Motor Insulation Grade	F	Clase de Servicio	H4/M5/2m/Class D
Trolley Motor Brake Type and DC Voltage	DC99V/DC207V	Protección IEC Motor	IP55
Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	Control	Pendant Control IP66
Optional Load Chain Brand & Country of Origin	FEC Japan	Voltaje del Control	24V
Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 50A at 220V and 30A at 460V	Parada de Emergencia	Yes
Power Cord Length and Phase Order	3 ft / Black L1 , Red L2 and Blue L3 Green ground	Hoist Contactor Brand	Schneider
Brake rectifiers-half-wave	PWRX-BKTF-HW	Tipo Transmisión / Reductor	Spur gearbox
Overload Protection	Overload Motor Clutch	Tipo de Cadena	G100 Nickel
Pendant Control Emergency Stop	Yes	Dimensiones de la Cadena	11.2 mm
Hoist Contactors Amps	25A	Caidas de Cadena	8
Hoist Contactor Coil Voltage	24 V	Longitud de cadena	320
IEC Hoist IP Protection	IP55	Humedad	20%~90%
2nd Package Type	Wood Crate	Temperatura	-4 ~ 104° F / -20 ~ 40° C
1st Package Type	Wood Crate	Potencia del Trolley	750+750
Reducer Lubrication Type	Oil	Velocidad del Trolley /min	2.75~27.55 ft @60Hz 0.7~7 mt @50Hz
Load Chain weight per foot [lbs]	1.83	Cantidad de Velocidades	Variable
Hoist Motor Insulation Grade	F	Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-39
Brake rectifiers-full-wave	PWRX-BKTF-FW	Garantía	3 Year
Hoist Motor Brake Type and DC Voltage	DC99V/DC207V		

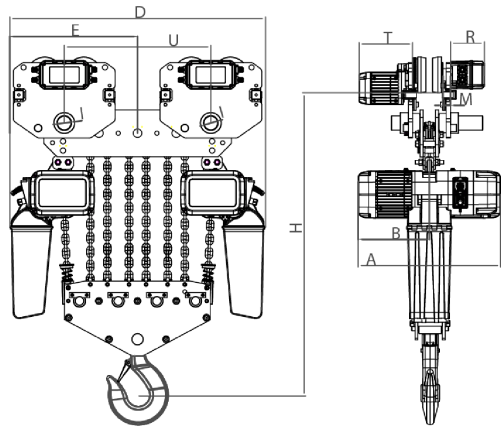

Rated load (t)	Type	Dimension (mm)												
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R
20	PWRXT20-08	1300	700	3500- 5500	350	1246	623	71	40	80	120	96	242	167

Peso & Dimensiones

Peso Total 1848 lbs / 839 Kg

Detalles del Empaque

H Altura Muerta 48.82

W Ancho 49.06

A Altura Total 51.18

J Boca Gancho 4.72

D Depth 27.56

Peso Total (sin cable o cadena) 845.76

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso