




5 ton Electric Chain Hoist w/ Power Trolley 1 Speed 208~240V / 440~480V 3ph 60HZ

Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

Pendant Control Yes No	Yes	Hoist Motor Brake Type and DC Voltage	DC99V/DC207V
Trolley Beam Extension Kit	up to 12"	Hour Meter	Internal Working Hour Meter
Trolley Beam Range	3.9" to 7"	Hoist Motor Power in KW	3
Trolley Minimum Turn Radius	1.8	IEC Pendant Control Protection	IP66
Trolley Wheel Material	No. 45 steel	Altura de Izaje Estandar (Customizable)	30 ft / 9 m
Trolley Wheel Diameter	139	Velocidad /min	10.63 ft @60Hz 2.70 mt @50Hz
Trolley Contactors Coil Voltage	24 V	Numero de Velocidades	1 Speed
Trolley Contactors Brand	Schneider	Voltaje	3 Phase 208~240/440~480V 50/60Hz
Trolley Contactors Amps	40A	Potencia Total Watts	4000
Trolley Motor Insulation Grade	F	Clase de Servicio	H4/M5/2m/Class D
Trolley Motor Brake Type and DC Voltage	DC99V/DC207V	Protección IEC Motor	IP55
Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	Control	Pendant Control IP66
Optional Load Chain Brand & Country of Origin	FEC Japan	Voltaje del Control	24V
Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 25A at 220V and 20A at 460V	Parada de Emergencia	Yes
Power Cord Length and Phase Order	3 ft / Black L1 , Red L2 and Blue L3 □Green ground	Hoist Contactor Brand	Schneider
Brake rectifiers-half-wave	PWRX-BKTF-HW	Tipo Transmisión / Reductor	Spur gearbox
Overload Protection	Overload Motor Clutch	Tipo de Cadena	G100 Nickel
Pendant Control Emergency Stop	Yes	Dimensiones de la Cadena	11.2 mm
Capacidad de Carga	5 ton	Caidas de Cadena	2
Hoist Contactors Amps	25A	Longitud de cadena	60
Hoist Contactor Coil Voltage	24 V	Humedad	20%~90%
IEC Hoist IP Protection	IP55	Temperatura	-4 ~ 104° F / -20 ~ 40° C
2nd Package Type	Wood Crate	Potencia del Trolley	750
1st Package Type	Wood Crate	Velocidad del Trolley /min	43.30 ft @60Hz 11 mt @50Hz
Reducer Lubrication Type	Oil	Cantidad de Velocidades	1
Load Chain weight per foot [lbs]	1.83	Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-36
Hoist Motor Insulation Grade	F	Garantía	3 Year
Brake rectifiers-full-wave	PWRX-BKTF-FW		

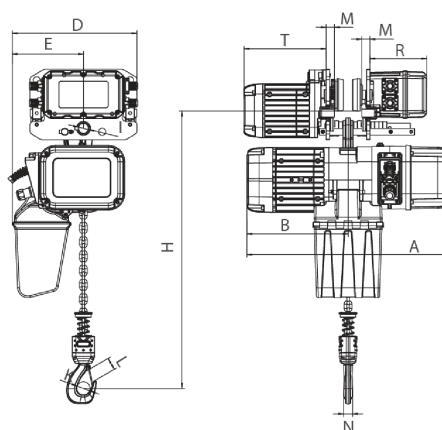

Rated load (t)	Type	Dimension (mm)												
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R
1	PWRXT1-01	473	440	3500- 5500	285	210	20	105	140					
2	PWRXT2-01	516	590		276	368	210	31	24	25	42	32	242	167
3	PWRXT3-01	600	681		350	422	264	36	28	35	52	42	242	167
5	PWRXT5-02	645	681		350	478	307	43	30	34	59	48	242	167

Peso & Dimensiones

Peso Total 544 lbs / 247 Kg

Detalles del Empaque

H Altura Muerta 31.89

W Ancho 16.54

A Altura Total 26.57

J Boca Gancho 2.36

D Depth 27.36

Peso Total (sin cable o cadena) 246.46

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso