




7.5 ton Electric Chain Hoist w/ Power Trolley Variable Speed 440~480V 3 ϕ 1/2 50~60HZ 30ft G100 Nickel Duty H4/M5

Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

VFD Model	Z230	Hoist Motor Insulation Grade	F
Brake Resistor Kw	1Kw	Load Chain weight per foot [lbs]	1.83
Pendant Control Yes No	Yes	Reducer Lubrication Type	Oil
Pendant Control Emergency Stop	Yes	1st Package Type	Wood Crate
Overload Protection	Overload Motor Clutch	2nd Package Type	Wood Crate
Power Cord Length and Phase Order	3 ft / Black L1 , Red L2 and Blue L3 Green ground	Altura de Izaje Estandar (Customizable)	30 ft / 9 m
Recommended Hoist Protection Circuit Breaker AMPs and Type	Type D 20A	Velocidad /min	1.1~7 ft @60Hz mt @50Hz
Optional Load Chain Brand & Country of Origin	FEC Japan	Numero de Velocidades	Variable Speed
Paint Specifications	Electrostatic Sprayed Plastic (ESP) Epoxy resins, Polyester Resins, Barium, Pigments	Voltaje	3 Phase 440~480V 60Hz
Trolley Motor Brake Type and DC Voltage	DC207V	Potencia Total Watts	4000
Trolley Motor Insulation Grade	F	Clase de Servicio	H4/M5/2m/Class D
Trolley VFD Power in KW	2.5kW	Protección IEC Motor	IP55
Trolley VFD Brand	Huayuan	Control	Pendant Control IP66
Trolley VFD Model	Z230	Voltaje del Control	24V
Trolley Wheel Diameter	139	Parada de Emergencia	Yes
Trolley Wheel Material	No. 45 steel	Tipo Transmisión / Reductor	Spur gearbox
Trolley Minimum Turn Radius	1.8	Tipo de Cadena	G100 Nickel
Trolley Beam Range	3.9" to 7"	Dimensiones de la Cadena	11.2 mm
Trolley Beam Extension Kit	up to 12"	Caidas de Cadena	3
Brake rectifiers-half-wave	PWRX-BKTF-HW	Longitud de cadena	90
Capacidad de Carga	7.5 ton	Humedad	20%~90%
Hoist VFD Power	4kW	Temperatura	-4 ~ 104° F / -20 ~ 40° C
Hoist VFD Brand	HUAYUAN	Potencia del Trolley	750
IEC Hoist IP Protection	IP55	Velocidad del Trolley /min	5.9~47.23 ft @60Hz 1.5~12 mt @50Hz
IEC Pendant Control Protection	IP66	Cantidad de Velocidades	Variable
Hoist Motor Power in KW	3	Normas	ASME HST-1 , ASME B30.16 , B30.17 , EN60204-37
Hour Meter	Internal Working Hour Meter	Garantía	3 Year
Hoist Motor Brake Type and DC Voltage	DC207V		

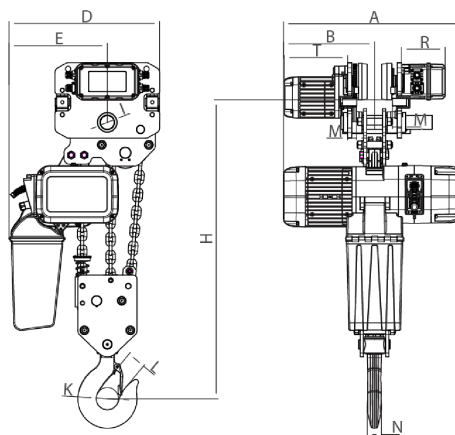

Rated load (t)	Type	Dimension (mm)												
		Minimum distance from the bottom of the track to the bottom hook: H	A	L	B	D	E	I	M	N	K	L	T	R
7	PWRXT7-03	1020	681	3500-5500	350	579	375	54	35	48	85	80	242	167

Peso & Dimensiones

Peso Total 869 lbs / 395 Kg

Detalles del Empaque

H Altura Muerta 46.06

W Ancho 22.68

A Altura Total 40.16

J Boca Gancho 3.35

D Depth 26.81

Peso Total (sin cable o cadena) 402.68

Referential Images / Imágenes Referenciales
Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso