



18000 Lb Heavy Duty Hydraulic Winch with tensioner, without any hydraulic accessories


Características Esenciales

- 3 Años de Garantía, Partes y Servicios Disponibles en América

Especificaciones Técnicas

Coupling Size	Hydraulic feed: G1/2 (x2)	Relación de Transmisión	17.3 : 1
Capacidad 1ª Capa	18000 lb / 8165 kg	Embriague	Manual
Velocidad /min	23 - 37 ft/min / 7-11.2 m/min	Cable Recomendado	ø9/16 in x98 ft ø14 mm x 30 m
Numero de Velocidades	Variable Speed	Normas	SAE-J706
Tipo de Motor	Hydraulic	Garantía	3 Year
Protección IEC Motor	IP67	Presión Aceite	2320 psi [16 Mpa]
Tipo Transmisión / Reductor	2 Stages Planetary / 2 Etapas Planetario	Flujo Aceite	60 l/min [15.8 gal/min]

PWYH18000

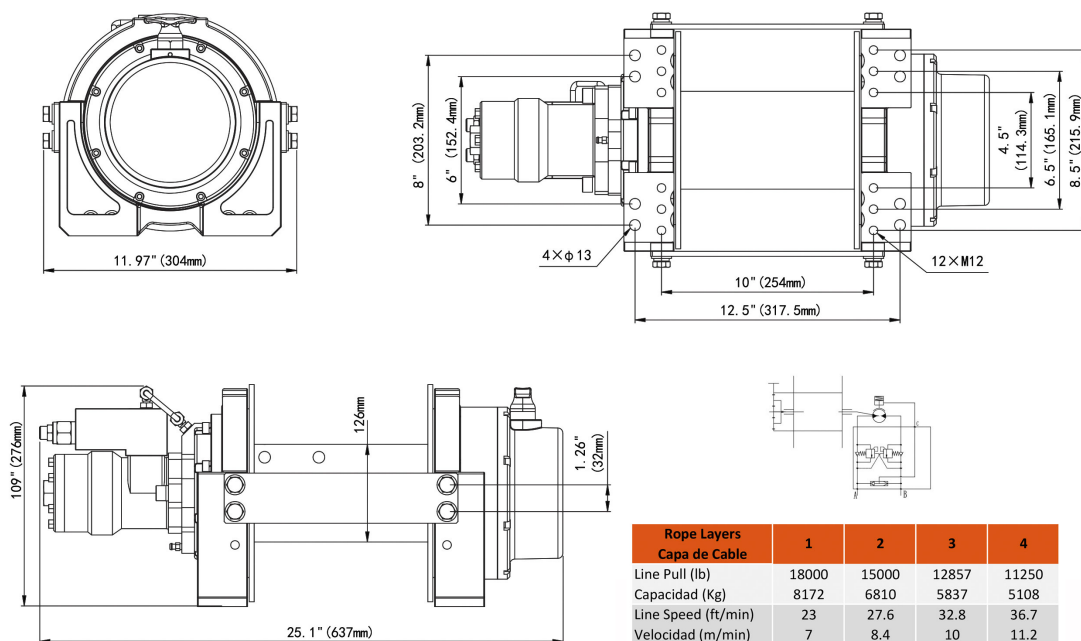

NOTE:

1. Recommended oil flow supply range is 35-75 l/min.
2. Dual balance valves as standard, winch must be used in Independent oil supply system which with relief valve.
3. Relief valve can be selected from the valve block selection table as optional.

WARNING:

1. The winch will never be used for hoisting people or hoisting objects above people.
2. Do not use clutch under load.
3. Do not equip winch into oil supply system which without relief valve.

Peso & Dimensiones

Peso Total 167 lbs / 76 Kg

Detalles del Empaque

A Altura Total 10.9 in

W Ancho 25 in

D Depth 12 in

Referential Images / Imágenes Referenciales

Specifications may change without notice / las especificaciones pueden cambiar sin previo aviso